



Anchors



00101



Beamer® 2000 Fall Arrest Anchor

- » Fits 3.5" - 14" beams (up to 1.25" thick)
- » Min. Breaking Strength: 5,000 lbs.
- » Perfect for use overhead or at foot level
- » Lightweight and durable
- » Moves smoothly along beam
- » Worker Capacity: 130-420 lbs.

ITEM #	ORDER #	DESCRIPTION	UOM
00101	K62400571	Beamer 2000	EA



Truss Boss Anchor

- » Anchorage connector ideal for fall arrest and restraint applications
- » Easy to install
- » Lightweight and durable
- » Installs upright or inverted
- » Zinc plated and galvanized steel
- » Worker Capacity: 130-310 lbs. - or up to 420 lbs. if used in combination with equipment explicitly certified for such use



00432

ITEM #	ORDER #	DESCRIPTION	UOM
00432	K62400551	Anchorage connector	EA



Ridge-It Anchor

- » Designed for permanent use on wood rooftops
- » 9.75" Single D-ring
- » Easy to install
- » Stainless steel, Zinc-plated steel and Butyl
- » Min. Breaking Strength: 5,000 lbs.
- » Worker Capacity: 130-420 lbs.



00500

ITEM #	ORDER #	DESCRIPTION	UOM
00500	K62400531	Single D-ring roof anchor	EA



Cross Arm Strap

- » Reusable anchorage connector that can be used in a variety of fall protection applications
- » Polyester and galvanized steel
- » Pass-Through Loop Ends
- » Length: 6 ft.
- » Worker Capacity: 130-420 lbs.
- » Min. Breaking Strength: 5,000 lbs.



01620

ITEM #	ORDER #	DESCRIPTION	UOM
01620	K62400421	Reusable anchorage connector	EA



6' Premium Cross Arm Strap

- » Reusable anchorage connector that can be used in a variety of fall protection applications
- » Reinforced webbing for superior durability and functionality
- » Min. Breaking Strength: 5,000 lbs.
- » Worker Capacity: 130-420 lbs.



ITEM #	ORDER #	DESCRIPTION	UOM
10787	K62400281	Reusable anchorage connector	EA



Anchors



2108406



Fixed Beam Anchors

- » Installs onto I-beam flange
- » Attach in any orientation or direction
- » High strength steel and aluminum construction
- » Swiveling D-ring tie-off point
- » Approval/Standards: ANSI A10.32, ANSI Z359.1, OSHA 1910.66, OSHA 1926.502
- » Capable of supporting a load of 5,000 lbs.
- » Weight Capacity: 310 lbs. (141 kg) ANSI / 420 lbs. (190 kg) OSHA
- » More lengths available

ITEM #	ORDER #	DESCRIPTION	UOM
2108406	458036011	Fits 2.5" to 12" (6.3-30.5 cm) Wide I-Beams up to 1.5" thick (3.8 cm)	EA
2108407	458036921	Fits 2.5" to 18" (6.3-45.7cm) wide I-Beam up to 1.5" thick (3.8cm)	EA
2108408	458084081	Fits 2.5" to 24" (6.3-61cm) wide I-Beam up to 1.5" thick (3.8cm).	EA
2108410	458084101	Fits 12" to 36" (30.5-91.4cm) wide I-Beam up to 0.5" to 2.5" thick (1.3-6.3cm).	EA



2101630



D-Rings with Anchorage Plate

- » Bolt or weld to structure for fall arrest anchor point
- » 304 stainless steel plate, pre-drilled holes
- » D-ring for compatible tie-off point
- » Approval/Standards: ANSI A10.32, ANSI Z359.1, OSHA 1910.66, OSHA 1926.502
- » Capable of supporting a load of 5,000 lbs.
- » Weight Capacity: 310 lbs. (141 kg) ANSI / 420 lbs. (190 kg) OSHA

ITEM #	ORDER #	DESCRIPTION	UOM
6.35 x 50 x 115 mm Plate, Pre-Drilled 14 mm Holes			
2101630	458016301	Zinc Plated Steel D-Ring	EA



1003000



Tie-Off Adapters

- » Pass-thru type tie-off adapter
- » Polyester construction, abrasion resistant wear pad and steel hardware
- » Approval/Standards: ANSI Z359.1, OSHA 1910.66, OSHA 1926.502
- » Capable of supporting a load of 5,000 lbs.
- » Weight Capacity: 310 lbs. (141 kg) ANSI / 420 lbs. (190 kg) OSHA

ITEM #	ORDER #	DESCRIPTION	UOM
1003000	458030001	Yellow, 3 Ft. Long	EA
1003006	458035001	Yellow, 6 Ft. Long	EA



5900578



PRO™ Tie-Off Adapter

- » Pass-thru type tie-off adapter
- » Durable polyester construction
- » High strength steel hardware
- » Approval/Standards: ANSI Z359.1, OSHA 1910.66, OSHA 1926.502
- » Capable of supporting a load of 5,000 lbs.
- » Weight Capacity: 310 lbs. (141 kg) ANSI / 420 lbs. (190 kg) OSHA

ITEM #	ORDER #	DESCRIPTION	UOM
5900577	458005881	Red, 3 Ft. Long	EA
5900578	458005871	Red, 6 Ft. Long	EA

Anchors



T7314

Honeywell
MILLER

Titan™ II Anchorage Strap

- » Webbing cross-arm strap wraps around I-beams and other structures
- » Attaches with a D-ring that slips through a web loop
- » Meets all applicable OSHA, ANSI and CSA standards

ITEM #	ORDER #	DESCRIPTION	UOM
T7314/6FTAF	341506661	Hi-Viz Orange, 6 Ft. Long	EA

MSA
The Safety Company

Workman® FP Stryder™ Anchorage Connectors

- » Easy, single-hand installation, 1/4" push-button interval adjustment
- » Teflon® wear pads enable gliding along beam flange
- » Integral load indicator alerts user if unit has been exposed to a fall
- » Mount overhead or at worker's feet
- » 400 lbs. working capacity
- » Specifications: ANSI Z359.1, OSHA

ITEM #	ORDER #	DESCRIPTION	UOM
10144431	308544331	Fits Beam Flange Widths 4" to 13.5"	EA

Honeywell
MILLER

Miller Grip™ 3/4" Portable/Reusable Anchorage Connectors

- » A safe anchor point is established when the anchor is inserted into a 3/4" properly-sized, cured concrete hole
- » Anchor can be removed and re-installed in a new location
- » Designed for use in cured concrete with a compression strength of at least 3,000 psi
- » Tested: ANSI Z359.1
- » Strength: 5,000 lbs.
- » Weight Capacity: 400 lbs.



496



ITEM #	ORDER #	DESCRIPTION	UOM
496	341508031	Anchorage Connector	EA



10144431

Carabiners



17D-1

Honeywell
MILLER

Miller Carabiners

- » Twist lock carabiners with spring loaded keepers
- » Used as anchorage connectors
- » Zinc dichromate plated forged alloy steel
- » Proof tested 3600 lbs., Min tensile strength 5,000 lbs. and Max working load 400 lbs.
- » Meets or exceeds OSHA 1926.502, ANSI Z359-2007 and CSA Z259.12 requirements

ITEM #	ORDER #	DESCRIPTION	UOM
17D-1	34150171	1" Gate Opening	EA
18D-1	341506821	2" Gate Opening	EA

3M | **SALA**
Fall Protection



2000112



2000114

Saflok™ Carabiners

- » Self-closing and locking gate for added safety
- » Highly corrosion resistant plated hardware
- » High strength steel construction
- » Approval/Standards: ANSI Z359.1, OSHA 1910.66, OSHA 1926.502
- » Capable of supporting a load of 5,000 lbs.
- » Weight Capacity: 310 lbs. (141 kg) ANSI / 420 lbs. (190 kg) OSHA

ITEM #	ORDER #	DESCRIPTION	UOM
2000112	458011121	0.6875" (17.5 mm) Gate Opening	EA
Double Action Autolok Gate, ANSI A10.32			
2000114	458020151	2.1875" (55.5 mm) Gate Opening	EA



D-Rings



1385000



PRO D-Ring Extension

- » Extends dorsal harness D-ring (or overhead anchor point)
- » Abrasion resistant polyester webbing
- » Self-locking snap hook and D-ring tie-off point
- » Approval/Standards: OSHA 1910.140, OSHA 1926.502
- » Weight Capacity: 310 lbs. (141 kg)

ITEM #	ORDER #	DESCRIPTION	UOM
1385000	458050011	1.5 Ft. Long	EA



1231117



D-Ring Extensions

- » Extends dorsal harness D-ring (or overhead anchor point)
- » Polyester webbing with built-in wear indicator
- » Self-locking snap hook and D-ring tie-off point
- » Equipped with i-Safe™ intelligent safety system RFID-enabled
- » Approval/Standards: ANSI Z359.3, OSHA 1926.502, OSHA 1910.140
- » Weight Capacity: 310 lbs. (141 kg)

ITEM #	ORDER #	DESCRIPTION	UOM
1231117	458036691	Yellow, 1.5 Ft. Long	EA

Fall Limiters



FL11-3-Z7



MiniLite® Fall Limiters

- » Lightweight, 2.5 lbs. (1.1 kg)
- » Up to 11 ft. (3.3m) of working capacity
- » Stainless steel braking system
- » Protective outer cover; visual load indicator
- » Unit connector: Steel twist-lock carabiner and swivel shackle
- » Lanyard end connector: Locking snap hook
- » ANSI Z359 Compliant

ITEM #	ORDER #	DESCRIPTION	UOM
FL11-3-Z7/11FT	341558351	11 Ft. Long Limiter	EA



MFL-1-Z7



TurboLite™ Personal Fall Limiter

- » Attaches directly to the back D-ring of a harness
- » Integral swivel prevents lifeline from twisting
- » Nylon housing and abrasion-resistant webbing
- » Unit connector: Steel twist-lock carabiner and swivel shackle
- » Rated for up to a 400 lb. (181.4 kg) worker
- » Meets requirements of OSHA, ANSI Z359.14 Class A & B and CSA Z259.2.2

ITEM #	ORDER #	DESCRIPTION	UOM
--------	---------	-------------	-----

Lanyard End Connector: Locking Snap Hook			
MFL-1-Z7/6FT	341557191	6 Ft. Long Limiter	EA

Lanyard End Connector: Locking Rebar Hook			
MFL-2-Z7/6FT	341564001	6 Ft. Long Limiter	EA

Fall Limiters

Honeywell MILLER

Scorpion™ Personal Fall Limiters

- » Greater versatility through dual operation: attach directly to the harness D-ring for use as a personal fall limiter, or use as a traditional retractable lifeline
- » Small, lightweight design 2.9 lbs. (1.3 kg)
- » Unit connector: Carabiner and swivel shackle
- » Lanyard end connector: Locking snap hook
- » Rated for up to a 400 lb. (181.4 kg) worker
- » Visual load indicator – indicates the unit must be removed from service
- » ANSI Z359 Compliant



ITEM #	ORDER #	DESCRIPTION	UOM
PFL-4-Z7/9FT	341558361	9 Ft. Long Limiter	EA

Honeywell MILLER

Turbo T-BAK™ Personal Fall Limiters

- » 7.5 ft. (2.3 m) working capacity
- » All-in-one, self-retracting lifeline/anchorage connector design
- » Designed for anchoring below a user's harness back D-ring
- » Integrated shock absorber designed for tie-back applications with load indicator device
- » Rated for up to a 400 lb. (181.4 kg) worker
- » ANSI Z359-compliant snap hook
- » Meets OSHA 1926.502, 1910.66, ANSI A10.32, ANSI Z359.1 and CSA Z259.12-01 Class 1, Z259.2.2-98 Type 1 requirements



ITEM #	ORDER #	DESCRIPTION	UOM
MFLT-5/7.5FT	341566461	7.5 Ft. Long Limiter	EA

Twin Turbo D-Ring Connector with (2) MFLT-1/7.5FT Units			
ITEM #	ORDER #	DESCRIPTION	UOM
MFLTB-1/7.5FT	341566471	(2) 7.5 Ft. Long Limiters	EA



MSA The Safety Company

Workman® Mini Personal Fall Limiter

- » Internal pawl-lock design provides many lower level tie-off points
- » Retractable lifeline
- » Swivel eye connection
- » 400 lb. user weight capacity
- » Rugged, impact resistant housing
- » External energy absorber provides visual load indicator for easy inspection
- » ANSI Z359.14, Class A, CSA Z259.2.2, OSHA, EN 360:2002

ITEM #	ORDER #	DESCRIPTION	UOM
10157844	308578441	Single Leg, 6 Ft. Long Limiter w/ AL36C Connector	EA



1500090



Battery Holster/Sleeve

- » Battery holster provides attachment point for tool lanyard
- » Sleeve is simply cinched to the drill
- » 10 lbs. (4.5 kg) capacity

ITEM #	ORDER #	DESCRIPTION	UOM
1500090	458055901	Black and Yellow	EA

Fall Protection for Tools



1500047



Hook2Loop Bungee Tethers

- » Designed to be used with most small hand tools
- » Self-Locking carabiner
- » 0.625" tubular webbing
- » Weight Capacity: 15 lbs. (6.8 kg)

ITEM #	ORDER #	DESCRIPTION	UOM
1500047	458055471	Yellow, Stretches 32" to 47" Long	EA



1500119



Small Parts Pouch

- » Innovative self-closure system
- » Easy to retrieve objects since no opening or closing necessary
- » Can be used from a belt or harness
- » Made from 18 oz. duck canvas

ITEM #	ORDER #	DESCRIPTION	UOM
1500119	458056191	Black	EA



1500104



Single Tool Holster

- » Single tool harness holster with retractor
- » Neoprene pocket with retractor
- » Bottom drain vent
- » High visibility reflectors
- » Magnetic tool staging system holds tools in place

ITEM #	ORDER #	DESCRIPTION	UOM
1500104	458056041	Black	EA



1500096



Scaffold Wrench Holster

- » Belt scaffold wrench holster with rear-feed retractor
- » Hook and loop closure strap keeps tools secure
- » D-Ring connection points bolster, 5 lbs. (2.3 kg) capacity
- » High visibility reflectors
- » Rear-feed retractor system with 1.5 lbs. (0.7 kg) capacity

ITEM #	ORDER #	DESCRIPTION	UOM
1500096	458055961	Black	EA



1500140



Safe Bucket

- » Heavy-duty vinyl is easy to clean
- » Innovative hook and loop closure system
- » Carabiner and hoisting strap
- » Six built-in connection points with 4.5 kg load rating each
- » Puncture resistant plating sewn into the base of the bucket
- » 250 lb. (113.4 kg) capacity

ITEM #	ORDER #	DESCRIPTION	UOM
1500140	458056401	Black and Yellow	EA



Fall Protection for Tools



1500003




Fall Protection for Tools

D-Ring

- » Creates instant attachment points
- » 0.5" D-Ring attachment point
- » Weight Capacity: 2 lbs. (0.9 kg)

ITEM #	ORDER #	DESCRIPTION	UOM
1500003	45805503	Yellow, 2.25" x 0.5"	10/Cs

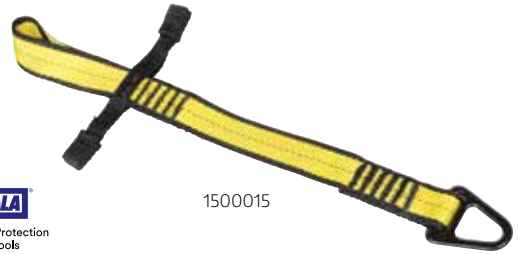

1500015



Fall Protection for Tools

Tool Cinch Attachment

- » V-Ring attachment point
- » Simple cinch design
- » Dual stabilization wings can be used to secure cinch in place
- » 35 lbs. (15.9 kg) capacity

ITEM #	ORDER #	DESCRIPTION	UOM
1500015	458055151	Yellow	EA



1500029



Fall Protection for Tools

Quick Spins

- » Tangle-resistant spin top
- » Reusable and suitable for non-conductive use
- » 1 lb. (0.5 kg) capacity, 1" diameter

ITEM #	ORDER #	DESCRIPTION	UOM
1500029	45805529	Yellow, Large	10/Cs



1500174



Fall Protection for Tools

Heavy-Duty Quick Wrap Tape II

- » Redesigned Quick-Wrap Tape II helps deliver long-lasting tool attachment performance
- » Creates instant tethering points
- » Resists tears better
- » Stretches further
- » Quick and easy installation

ITEM #	ORDER #	DESCRIPTION	UOM
1500174	458004891	Yellow, 1" Wide x 9 Ft. Long	EA



Bandit™ Tool Lanyard

- » Attaches to the user's belt
- » Tools are attached with the carabiner or by cinching the cord around tool

ITEM #	ORDER #	DESCRIPTION	UOM
9077/1	341510611	Tool Lanyard	EA

9077/1



Fall Protection for Tools



19650



19651



19652

Squids Tool Tethering Kits

- » **19650** - Squids 3180 Tethering Kit includes: (1) 3130S coil lanyard, (1) 12 ft. (3.7 m) roll of 3755 self-adhering tape trap and (6) 3700 web tool tails. This kit allows you to tether up to six 2 lb. (0.9 kg) tools
- » **19651** - Squids 3181 Tethering Kit includes: (1) 3102F(x) detachable single carabiner lanyard, (1) 12 ft. (3.7 m) roll of 3755 self-adhering tape trap and (3) 3103 detachable elastic tool tails. This kit allows you to tether up to four 5 lb. (2.3 kg) tools
- » **19652** - Squids 3182 Tethering Kit includes: (1) 3100F(x) single carabiner tool lanyard, (1) 12 ft. (3.7m) roll of 3755 self-adhering tape trap and (3) 3713 swiveling elastic tool tails. This kit allows you to tether up to three 10 lb. (4.5 kg) tools

ITEM #	ORDER #	DESCRIPTION	WEIGHT RATING	UOM
19650	332101451	3180 Tool Tethering Kit	2 lb. (0.9 kg)	EA
19651	332101441	3181 Tool Tethering Kit	5 lb. (2.3 kg)	EA
19652	332101361	3182 Tool Tethering Kit	10 lb. (4.5 kg)	EA



19660



19661



19662

Squids Specialty Tool Tethering Kits

- » **19660** - Squids 3190 Tape Measure Tethering Kit includes: (1) 3130S coil lanyard and (1) 3770 tape measure trap. This kit allows you to tether (1) standard 2 lb. (0.9 kg) tape measure
- » **19661** - The Squids 3191 Power Tool Tethering Kit includes: (1) 3100F(x) single carabiner tool lanyard and (1) 3780L power tool trap. This kit allows you to tether (1) standard 6 lb. (2.7 kg) power tool
- » **19662** - The Squids 3192 Wrist Lanyard Tethering Kit includes: (1) 3116 pull-on wrist lanyard with buckle, (1) 12 ft. roll (3.7 m) of 3755 self-adhering tape trap and (3) 3103 detachable elastic tool tails. This kit allows you to tether up to (4) 3 lb. (1.4 kg) tools

ITEM #	ORDER #	DESCRIPTION	UOM
19660	332101351	3190 Tape Measure Tethering Kit	EA
19661	332101331	3191 Power Tool Tethering Kit	EA
19662	332101321	3192 Wrist Lanyard Tethering Kit	EA



Harnesses



Series 1 Harnesses

- » Perfect entry-level harness solution
- » Captivated chest strap
- » Dual lanyard keepers
- » 2-Bar torso adjuster
- » Rubber web ends
- » Impact indicator
- » Polyester webbing
- » Galvanized Steel D-ring
- » Capacity: 130-420 lbs



37002

ITEM #	ORDER #	DESCRIPTION	UOM
37000	K62400141	Size: XS-S, Chest & Leg Pass-Through Buckles	EA
37001	K62400131	Size: M-L, Chest & Leg Pass-Through Buckles	EA
37002	K62400121	Size: XL-2XL, Chest & Leg Pass-Through Buckles	EA
37016	K62400111	Size: XS-S, Chest Quick-Connect, Leg Tongue Buckles	EA
37017	K62400101	Size: M-L, Chest Quick-Connect, Leg Tongue Buckles	EA
37018	K62400091	Size: XL-2XL, Chest Quick-Connect, Leg Tongue Buckles	EA



37117



Series 3 Harnesses

- » Focuses on comfort and performance
- » Captivated chest strap
- » Lanyard keepers
- » Heavy-duty waist pad
- » Spring torso adjuster
- » Snap-on shoulder padding
- » SRL connector loop
- » Impact indicator
- » Polyester webbing
- » Galvanized Steel D-ring
- » Capacity: 130-420 lbs

ITEM #	ORDER #	DESCRIPTION	UOM
37116	K62400081	Size: XS-S, Chest Quick-Connect, Leg Tongue Buckles	EA
37117	K62400071	Size: M-L, Chest Quick-Connect, Leg Tongue Buckles	EA
37118	K62400061	Size: XL-2XL, Chest Quick-Connect, Leg Tongue Buckles	EA
37196	K62400051	Size: XS-S, Chest Quick-Connect, Leg Tongue Buckles, & Waist Pad	EA
37197	K62400041	Size: M-L, Chest Quick-Connect, Leg Tongue Buckles, & Waist Pad	EA
37198	K62400031	Size: XL-2XL, Chest Quick-Connect, Leg Tongue Buckles, & Waist Pad	EA



Seraph Construction Harness w/Side D-Rings

- » Heavy duty and comfortable waist pad with strong belt loops
- » Reinforced tool belt which won't sag or fold under heavy weights
- » Dorsal D-ring
- » Pass-through chest strap
- » Tongue-buckle leg straps
- » Two lanyard keepers
- » Durable back placard
- » Removable/replaceable back and shoulder padding



11173

ITEM #	ORDER #	DESCRIPTION	UOM
11173	K62400201	Size: M-L, Pass-Through Chest Buckles, Leg Tongue Buckles	EA
11171	K62400211	Size: XL-2XL, Pass-Through Chest Buckles, Leg Tongue Buckles	EA



Harnesses



01703



01705



Velocity Full-Body Harnesses

- » 5 Points of adjustment
- » Pass-through chest strap
- » Tongue buckle leg straps
- » Dorsal D-ring
- » Padded D-ring placard
- » Impact indicator
- » Sub-pelvic strap
- » Dual lanyard keepers
- » Contrasting core webbing to indicate wear and aid inspection
- » Capacity: 130-420 lbs.

ITEM #	ORDER #	DESCRIPTION	UOM
01703	K62400411	Size: S-L, Pass-Through Chest Buckles, Leg Tongue Buckles, Dorsal D-ring	EA
01704	K62400401	Size: XL-2XL, Pass-Through Chest Buckles, Leg Tongue Buckles, Dorsal D-ring	EA
01705	K62400391	Size: S-L, Pass-Through Chest Buckles, Leg Tongue Buckles, Side D-rings	EA



Bucket of Safe-Tie w/ Temper Anchor

- » Incorporates an integrated shock absorber into the lifeline
- » Temper Reusable Anchor
- » 50 ft. Vertical lifeline assembly
- » Steel, polyester, and nylon
- » Velocity harness (S-L)
- » 5 Gallon bucket
- » Capacity: 130-310 lbs.

00815



ITEM #	ORDER #	DESCRIPTION	UOM
00815	K62400491	Size: S-L, Bucket of Safe-Tie	EA



1100633



Delta™ Comfort Construction Style Positioning/Climbing Harness

- » Built-in shoulder, back and leg comfort padding
- » Front D-ring, fixed back D-ring
- » Rigid body belt and hip pad with side D-rings
- » Tongue buckle leg straps, polyester webbing
- » Built-in lanyard keepers with break-away feature
- » Revolver™ vertical torso adjusters
- » Impact indicator, protected labels and equipped with i-Safe™
- » ANSI Z359.1, ANSI Z359.3, OSHA 1910.66, OSHA 1926.502
- » Weight Capacity: 420 lbs. (190 kg)

ITEM #	ORDER #	DESCRIPTION	UOM
1100633	458034691	Yellow, Size Medium	EA
1100634	458034711	Yellow, Size Large	EA



Harnesses



1100747



Delta™ Comfort Vest Style Harnesses

- » Built-in shoulder, back and leg comfort padding
- » Fixed back D-ring
- » Tongue buckle leg straps, polyester webbing
- » Built-in lanyard keepers with break-away feature
- » Revolver™ vertical torso adjusters, loops for body belt
- » Impact indicator, protected labels and equipped with i-Safe™
- » ANSI Z359.1, ANSI Z359.3, OSHA 1910.66, OSHA 1926.502
- » Tensile Strength: 6000 lb., Weight Capacity: 420 lbs. (190 kg)

ITEM #	ORDER #	DESCRIPTION	UOM
1100747	458000741	Yellow, Size Large	EA
1100748	458000761	Yellow, Size XLarge	EA



1110600



Delta™ Vest Style Harnesses

- » Stand-up back D-ring
- » Repel™ webbing
- » Built-in lanyard keepers
- » Revolver™ vertical torso adjusters
- » Impact indicator, protected labels and equipped with i-Safe™
- » ANSI Z359.11
- » Tensile Strength: 6000 lb.
- » Weight Capacity: 420 lbs. (190 kg)

ITEM #	ORDER #	DESCRIPTION	UOM
Tech-Lite™ Quick-Connect Buckle Leg Straps			
1110600	458010601	Yellow, Size Universal	EA
Tongue Buckle Leg Straps			
1102000	458020021	Yellow, Size Universal	EA
Tongue Buckle Leg Straps, Side D-Rings			
1102008	458020061	Yellow, Size Universal	EA
Pass-Thru Buckle Leg Straps			
1103321	458035041	Yellow, Size Universal	EA



Delta™ Construction Style Positioning Harness

- » Stand-up back D-ring
- » Body belt/hip pad with side D-rings
- » Tongue buckle leg straps, shoulder pads
- » Repel™ webbing, built-in lanyard keepers
- » Revolver™ vertical torso adjusters
- » Impact indicator, protected labels and equipped with i-Safe™
- » ANSI Z359.11
- » Tensile Strength: 6000 lb.
- » Weight Capacity: 420 lbs. (190 kg)



1101655

ITEM #	ORDER #	DESCRIPTION	UOM
1101654	458035011	Yellow, Size Medium	EA
1101655	458035021	Yellow, Size Large	EA



Harnesses



Delta™ II Derrick Harnesses

- » 18" back D-ring extension
- » Body belt/hip pad with back D-ring
- » Seat sling with positioning D-rings
- » Tongue buckle leg straps
- » Parachute torso buckles
- » Protected labels and equipped with i-Safe™
- » ANSI A10.32, ANSI Z359.1, OSHA 1910.66, OSHA 1926.502
- » Weight Capacity: 420 lbs. (190 kg)



1106101

ITEM #	ORDER #	DESCRIPTION	UOM
1106101	458061011	Yellow, Size Medium	EA
1106102	458061021	Yellow, Size Large	EA
1106103	458061031	Yellow, Size XLarge	EA



ExoFit™ Vest Style Harnesses

- » Built-in shoulder, back and leg comfort padding
- » Back D-ring
- » Quick connect chest and leg straps
- » Soft, lightweight webbing, loops for body belt
- » Anti-tear ballistic nylon
- » Built-in reflective piping
- » Parachute torso buckles
- » Protected labels and equipped with i-Safe™
- » ANSI A10.32, ANSI Z359.1, ANSI Z359.4, OSHA 1926.502
- » Tensile Strength: 6000 lb., Weight Capacity: 420 lbs. (190 kg)



1107975

ITEM #	ORDER #	DESCRIPTION	UOM
1107975	458079751	Blue, Size Small	EA
1107976	458079761	Blue, Size Medium	EA
1107977	458079771	Blue, Size Large	EA
1107981	458079811	Blue, Size XLarge	EA



ExoFit™ XP Vest Style Harnesses

- » Removable shoulder, back and leg comfort padding
- » Stand-up back D-ring with impact indicator
- » Quick connect chest and leg straps
- » Loops for body belt
- » Built-in lanyard keepers
- » Parachute torso buckles
- » Protected labels and equipped with i-Safe™
- » ANSI A10.32, ANSI Z359.1, ANSI Z359.4, OSHA 1910.66, OSHA 1926.502
- » Tensile Strength: 6000 lb., Weight Capacity: 420 lbs. (190 kg)



1110101

ITEM #	ORDER #	DESCRIPTION	UOM
1110101	458001011	Blue, Size Medium	EA
1110102	458001021	Blue, Size Large	EA



Harnesses

1110152



ExoFit™ XP Construction Style Harnesses

- » Removable shoulder, back and leg comfort padding
- » Stand-up back D-ring with impact indicator
- » Body belt/hip pad with side D-rings
- » Quick connect chest and leg straps
- » Built-in lanyard keepers
- » Parachute torso buckles
- » Protected labels and equipped with i-Safe™
- » ANSI A10.32, ANSI Z359.1, ANSI Z359.4, OSHA 1910.66, OSHA 1926.502
- » Tensile Strength: 6000 lb., Weight Capacity: 420 lbs. (190 kg)

ITEM #	ORDER #	DESCRIPTION	UOM
1110152	458001521	Blue, Size Large	EA



ExoFit™ XP Arc Flash Harnesses

- » Removable Nomex®/Kevlar® fiber shoulder, back and leg comfort padding
- » PVC coated back D-ring, pass-thru buckle leg straps and pass-thru torso buckles
- » Nomex®/Kevlar® fiber webbing
- » Arc flash resistant up to 40 cal/cm2
- » Protected labels and equipped with i-Safe™
- » ANSI Z359.1, ASTM F887, OSHA 1910.66, OSHA 1926.502
- » Tensile Strength: 7000 lb., Weight Capacity: 420 lbs. (190 kg)



1110893

ITEM #	ORDER #	DESCRIPTION	UOM
1110893	458018931	Black, Size Small	EA
1110890	458008901	Black, Size Medium	EA
1110891	458008911	Black, Size Large	EA
1110892	458008921	Black, Size X-Large	EA



ExoFit STRATA™ Construction Style Positioning/Climbing Harnesses

- » LIFTech™ weight distribution system
- » PolarMesh™ back pad, EZ-Link™ SRL adapter
- » Tri-Lock Revolver™ quick connect buckles
- » Stand-up Tech-Lite™ aluminum dorsal D-ring
- » Body belt/hip pad with thermoformed EVA padding and Tech-Lite™ aluminum side D-rings
- » Snap and Go Tech-Lite™ aluminum front D-ring
- » Repel™ webbing, built-in lanyard keepers that automatically reset
- » ANSI Z359.1, ANSI Z359.11, OSHA 1910.66, OSHA 1926.502
- » Weight Capacity: 420 lbs. (190 kg)



1112540

ITEM #	ORDER #	DESCRIPTION	UOM
1112540	458025401	Blue and Gray, Size Small	EA
1112541	458025411	Blue and Gray, Size Medium	EA
1112542	458025421	Blue and Gray, Size Large	EA

Harnesses



ExoFit STRATA™ Construction Style Positioning Harnesses

- » LIFTech™ weight distribution system
- » PolarMesh™ back pad, EZ-Link™ SRL adapter
- » Tri-Lock Revolver™ quick connect buckles
- » Stand-up Tech-Lite™ aluminum dorsal D-ring
- » Body belt/hip pad with thermoformed EVA padding and Tech-Lite™ aluminum side D-rings
- » Repel™ webbing, built-in lanyard keepers that automatically reset
- » Impact Indicator, integrated suspension trauma straps
- » Customizable name tag, protected labels and equipped with i-Safe™
- » ANSI Z359.1, ANSI Z359.11, OSHA 1910.66, OSHA 1926.502
- » Weight Capacity: 420 lbs. (190 kg)

ITEM #	ORDER #	DESCRIPTION	UOM
1112536	458025361	Blue and Gray, Size Medium	EA
1112537	458025371	Blue and Gray, Size Large	EA



ExoFit NEX™ Vest Style Harnesses

- » Hybrid shoulder, back and leg comfort padding
- » Stand-up Tech-Lite™ aluminum back D-ring
- » Duo-Lok™ quick connect chest and leg straps
- » Repel™ webbing, protective shoulder caps and loops for body belt
- » Built-in lanyard keepers, Revolver™ vertical torso adjusters
- » Built-in reflective materials, protected labels and equipped with i-Safe™
- » ANSI A10.32, ANSI Z359.1, ANSI Z359.4, OSHA 1910.66, OSHA 1926.502
- » Tensile Strength: 6000 lb., Weight Capacity: 420 lbs. (190 kg)



ITEM #	ORDER #	DESCRIPTION	UOM
1113001	458036381	Gray, Size Small	EA
1113004	458036391	Gray, Size Medium	EA
1113007	458036401	Gray, Size Large	EA
1113010	458036411	Gray, Size XLarge	EA



ExoFit NEX™ Construction Style Harnesses

- » Stand-up Tech-Lite™ aluminum back D-ring
- » Body belt/hip pad with Tech-Lite™ aluminum side D-rings
- » Duo-Lok™ quick connect chest and leg straps
- » Repel™ webbing and protective shoulder caps
- » Built-in lanyard keepers, Revolver™ vertical torso adjusters
- » Impact Indicator, integrated trauma straps
- » Built-in reflective materials, protected labels and equipped with i-Safe™
- » ANSI A10.32, ANSI Z359.1, ANSI Z359.4, OSHA 1910.66, OSHA 1926.502
- » Tensile Strength: 6000 lb., Weight Capacity: 420 lbs. (190 kg)

ITEM #	ORDER #	DESCRIPTION	UOM
1113121	458036421	Gray, Size Small	EA
1113124	458036431	Gray, Size Medium	EA
1113127	458036441	Gray, Size Large	EA
1113130	458036451	Gray, Size XLarge	EA



Harnesses



ExoFit STRATA™ Vest-Style Harness

- » PolarMesh™ back pad, EZ-Link™ SRL adapter
- » Duo-Lok™ quick connect chest and leg straps
- » Stand-up Tech-Lite™ aluminum dorsal D-ring
- » Repel™ webbing, built-in lanyard keepers that automatically reset
- » Revolver™ vertical torso adjusters
- » Impact Indicator, integrated suspension trauma straps
- » Fall protection for tools attachment point
- » ANSI Z359.11, Weight Capacity: 420 lbs. (190 kg)

1112497



ITEM #	ORDER #	DESCRIPTION	UOM
1112497	458006031	Blue and Gray, Size Large	EA



ExoFit STRATA™ Vest-Style Harness

- » PolarMesh™ back pad, EZ-Link™ SRL adapter
- » Tri-Lock Revolver™ quick connect buckles
- » Stand-up Tech-Lite™ aluminum dorsal D-ring
- » Repel™ webbing, built-in lanyard keepers that automatically reset
- » Revolver™ vertical torso adjusters
- » Impact Indicator, integrated suspension trauma straps
- » Customizable name tag, protected labels and equipped with i-Safe™
- » ANSI Z359.11, Weight Capacity: 420 lbs. (190 kg)

1112475



ITEM #	ORDER #	DESCRIPTION	UOM
1112475	458005891	Blue and Gray, Size Small	EA
1112476	458005921	Blue and Gray, Size Medium	EA
1112477	458005931	Blue and Gray, Size Large	EA
1112478	458005941	Blue and Gray, Size XLarge	EA
1112479	458005951	Blue and Gray, Size 2XLarge	EA



ExoFit STRATA™ Vest-Style Positioning Harness

- » PolarMesh™ back pad, EZ-Link™ SRL adapter
- » Tri-Lock Revolver™ quick connect buckles
- » Stand-up Tech-Lite™ aluminum dorsal D-ring
- » Tech-Lite™ aluminum side D-rings
- » Repel™ webbing, built-in lanyard keepers that automatically reset
- » Revolver™ vertical torso adjusters
- » Impact Indicator, integrated suspension trauma straps
- » Customizable name tag, protected labels and equipped with i-Safe™
- » Fall protection for tools attachment point
- » Weight Capacity: 420 lbs. (190 kg), ANSI Z359.11

1112482



ITEM #	ORDER #	DESCRIPTION	UOM
1112482	458006071	Blue and Gray, Size Large	EA



Harnesses



Protecta® Construction Style Positioning Harness

- » Fixed D-ring reduces the need for readjustment throughout the workday
- » Moisture-wicking, breathable back padding with soft edging for added comfort
- » Foam hip pad with mesh provides extra comfort and breathability
- » Durable and sturdy belt for tool bag-carrying convenience
- » ANSI-compliant auto-resetting lanyard keepers for fast and easy parking of snap hooks and carabiners
- » Impact indicators make it easy to inspect the harness for prior damaging impact loads
- » ANSI Z359.11, OSHA 1926.502
- » Tensile Strength: 3600 lb., Weight Capacity: 420 lbs. (190 kg)

ITEM #	ORDER #	DESCRIPTION	UOM
1161309	458006611	Red and Black, Size Medium/Large	EA
1161310	458006631	Red and Black, Size X-Large	EA



FIRST™ Vest Style Harnesses

- » Back D-ring
- » Pass-thru buckle leg straps
- » Parachute torso adjusters
- » Durable polyester web construction
- » ANSI Z359.11, ANSI Z359.1, OSHA 1910.66, OSHA 1926.502
- » Tensile Strength: 6000 lb., Weight Capacity: 310 lbs. (140 kg)

AB17530



ITEM #	ORDER #	DESCRIPTION	UOM
AB17530	458075301	Blue and Black, Size Universal	EA
AB17550	458036081	Blue and Black, Size XLarge	EA



Compliance in a Can™ Roofer's Fall Protection Kits

- » OSHA 1910.66, OSHA 1926.502, Weight Capacity: 310 lbs. (140 kg)
- » Reusable and extremely durable roof anchor with fasteners (model 2104000)
- » Lightweight FIRST™ harness with pass-thru buckle legs and 5-point adjustment (model 1191995)
- » Compact rope adjuster with built-in 2 ft. (0.6 m) PRO™ shock absorbing lanyard (model 1340005)
- » Durable and lightweight 0.625" Dia. (1.6 cm) 50 ft. (15.2 m) blended lifeline with snap hook (model 1204001)
- » Durable bucket with handle



2199803

ITEM #	ORDER #	DESCRIPTION	UOM
2199803	458098031	Compliance Version	EA



Harnesses



650CN-BDP/UGN

Honeywell
MILLER

Contractor Harnesses

- » Combination back D-ring pad/shoulder pads
- » Friction buckle shoulder adjustments
- » Mating buckle chest adjustments
- » Tongue buckle legs adjustments
- » Back lumbar pad, (2) pull-free lanyard rings
- » Waist belt (removable) for tool pouches
- » Meets applicable OSHA, ANSI and CSA Standards
- » Weight Capacity: 400 lbs. (181.4 kg)

ITEM #	ORDER #	DESCRIPTION	UOM
With Back and Side D-Rings			
650CN-BDP/UGN	341579911	Universal Size, (L, XL)	EA
With Back D-Rings			
650CN-BP/UGN	341558481	Universal Size, (L, XL)	EA

Honeywell
MILLER

Lightweight/Comfort Welder Harness

- » Features blue, flame-retardant Nomex® webbing to protect against weld splatter
- » Inner Kevlar® core adds strength and high-temperature resistance
- » Friction buckle shoulder adjustments
- » Mating buckle chest and leg straps
- » Meets applicable OSHA, ANSI and CSA Standards
- » Rated to 400 lbs. (181.4 kg) capacity when using a SofStop shock absorber (940K/6FTBL)

ITEM #	ORDER #	DESCRIPTION	UOM
650K/UBL	341558471	Universal Size, (L, XL)	EA



650K/UBL



E650/UGN

Honeywell
MILLER

DuraFlex® Harness

- » Specially-formulated elastomer webbing that stretches to provide greater comfort
- » D-ring back pad for comfort
- » Self-contained label pack encapsulates labels
- » Integrated and oversized pull-free lanyard rings
- » Friction buckle shoulder adjustments
- » Mating buckle leg straps
- » Meets applicable OSHA, ANSI and CSA Standards
- » Rated to 400 lbs. (181.4 kg) capacity, 6,000 lb. tensile strength

ITEM #	ORDER #	DESCRIPTION	UOM
E650/UGN	341559051	Universal Size, (L, XL)	EA



Harnesses



Honeywell MILLER®

Revolution™ Harnesses with DualTech™ Webbing

- » Web finials - clip-on design safely organizes webbing after proper adjustment
- » PivotLink™ connection - rotary design provides greater mobility
- » ErgoArmor back shield - minimizes impact from snap hooks and lifelines
- » Cam Buckles - one-hand adjustment/release for shoulder straps
- » Side D-rings and pad
- » Quick-connect buckle legs, removable belt
- » Accessory System - provides connection points for belts/tools/accessories
- » Self-contained label pack
- » Meets applicable OSHA, ANSI and CSA Standards
- » Rated to 400 lbs. (181.4 kg) capacity, 7,000 lb. tensile strength

ITEM #	ORDER #	DESCRIPTION	UOM
RDT-QC/UBK	341504611	Universal Size, (L, XL)	EA

Honeywell MILLER®

Titan™ II Non-Stretch Harnesses

- » Easier vertical adjustability, slip resistant back D-ring pad
- » Lighter, strategically-placed padding that provides optimal airflow
- » Lightweight, Hi-Viz color webbing and ANSI Z359.11 compliance
- » Meets applicable OSHA, ANSI and CSA Standards
- » Rated to 400 lbs. (181.4 kg) capacity
- » Universal Size (Large/XLarge)

ITEM #	ORDER #	DESCRIPTION	UOM
T2000/UAK	341590011	With Sliding Back D-Ring; Mating Buckle Chest and Legs	EA
T4000/UAK	341541571	With Sliding Back D-Ring; Mating Buckle Legs, Chest and Shoulder Straps; Sub-Pelvic Strap	EA
T4007/UAK	341506431	With Sliding Back D-Ring; Side D-Rings, Mating Buckle Legs, Chest and Shoulder Straps; Sub-Pelvic Strap	EA
T4007FD/UAK	341541591	With Sliding Back D-Ring; Front D-Ring, Side D-Rings, Mating Buckle Legs, Chest and Shoulder Straps; Sub-Pelvic Strap	EA
T4500/UAK	341506461	With Sliding Back D-Ring; Tongue Buckle Legs, Mating Buckle Chest and Shoulder Straps; Sub-Pelvic Strap	EA
T4507/UAK	341506471	With Sliding Back D-Ring; Side D-Rings; Tongue Buckle Legs, Mating Buckle Chest and Shoulder Straps; Sub-Pelvic Strap	EA
T4577/UAK	341506481	With Sliding Back D-Ring; Tongue Buckle Legs, Mating Buckle Chest; Friction Buckle Shoulder Straps; Side D-Rings; Shoulder/Waist Padding and Removable Belt	EA





Harnesses



Titan™ II T-Flex™ Stretchable Harnesses

- » Stretchable harnesses have a durable, stretch webbing construction for improved mobility
- » Easier vertical adjustability, slip resistant back D-ring pad
- » Lighter, strategically-placed padding that provides optimal airflow
- » Lightweight, Hi-Viz color webbing and ANSI Z359.11 compliance
- » Meets applicable OSHA, ANSI and CSA Standards
- » Rated to 400 lbs. (181.4 kg) capacity
- » Universal Size (Large/XLarge)



ITEM #	ORDER #	DESCRIPTION	UOM
TF4000/UAK	341505621	With Sliding Back D-Ring; Mating Buckle Legs, Chest and Shoulder Straps; Sub-Pelvic Strap	EA
TF4007/UAK	341505631	With Sliding Back D-Ring; Side D's, Mating Buckle Legs, Chest and Shoulder Straps; Sub-Pelvic Strap	EA
TF4500/UAK	341505641	With Sliding Back D-Ring; Tongue Buckle Legs, Mating Buckle Chest and Shoulder Straps; Sub-Pelvic Strap	EA
TF4507/UAK	341505651	With Sliding Back D-Ring; Side D's; Tongue Buckle Legs, Mating Buckle Chest and Shoulder Straps; Sub-Pelvic Strap	EA



V-FORM™ Safety Harness

- » The patent-pending RaceFORM buckle allows for a close comfortable full body harness fit - eliminating the need for a bulky chest strap
- » Athletic cut that contours to the body and allows for increased upper torso mobility
- » Pull-down adjustment allows for quick and easy harness adjustment that ensures a proper fit that lasts throughout the work day
- » Meets applicable ANSI Z359.11-2014 and CSA Z259.10-2018 Standards

ITEM #	ORDER #	DESCRIPTION	UOM
10197196	308518351	Standard Size, Back D-Ring, Qwik-Fit Leg Straps	EA
10196642	308517081	Standard Size, Back D-Ring, Tongue Buckle Leg Straps	EA
10197160	308517091	Extra Large Size, Back D-Ring, Tongue Buckle Leg Straps	EA



Workman® Arc Flash Harnesses

- » Nylon material won't melt or drip in the event of an arc flash
- » Y-shaped D-locator pad keeps torso straps off the user's neck
- » Velcro lanyard keepers for stowage when not in use
- » Arc Flash symbol for easy identification
- » Meets applicable OSHA 1910.66, OSHA 1926.502, OSHA Z359.1-2007, ANSI Z359.11-2014, ASTM F887-2013 and CSA Z259.10 Standards

ITEM #	ORDER #	DESCRIPTION	UOM
10152637	308526391	Standard Size, with BACK STEEL D-Ring and Tongue Buckle Leg Straps	EA
10152652	308526551	Standard Size, with BACK STEEL D-Ring and Qwik-Fit leg Straps	EA



Harnesses



Gravity® Harness

- » Abrasion and moisture resistant and is suitable for working in harsh environments
- » Uses a special urethane web coating to resist stains and wear and tear
- » Suitable for controlled descent, positioning, ladder climbing, rescue and fall arrest
- » Includes load-indicator alert if harness was involved in a fall event
- » Meets ANSI Z359.1, OSHA standards and is CSA certified
- » Rated 400 lbs. (180 kg) capacity



ITEM #	ORDER #	DESCRIPTION	UOM
10155875	308504711	Standard Size, Yellow Vest-Type, with BACK & HIP D-Rings and Tongue Buckle Leg Straps	EA

Hoist System



Advanced™ 5-Piece Hoist System

- » Aluminum construction, 5-piece davit hoist system
- » Integrated 5,000 lb. (22 kN) mast anchorage point
- » Fall arrest rated in all davit offset mast positions
- » Built-in primary and secondary pulleys
- » Adjustable vertical height of 33" to 43"
- » Detent and knob style adjustment
- » Combine up to 2 extensions, extends the davit mast height
- » Base width adjusts from 94 cm to 162.6 cm, foot level and height adjustment system
- » ANSI Z359.1, OSHA 1926.502
- » Weight capacity: 450 lbs. (204 kg)

ITEM #	ORDER #	DESCRIPTION	UOM
8518000	458068271	Green and Silver	EA



IN-2404



10158178



Workman® Rescuer

- » User capacity up to 400 lbs. for personnel
- » Integral mounting bracket, stainless steel carrying handle
- » Color-coded switch for retrieval, built-in shock absorber
- » Aluminum housing with thermoplastic bumpers
- » Self-locking swivel snap hook with load indicator
- » Stow-able, foldable crank handle
- » RFID-enabled
- » Meets all applicable OSHA regulations, ANSI Z359.14

ITEM #	ORDER #	DESCRIPTION	UOM
10158178	308504721	With 0.1875" Stainless Steel Cable, 50 Ft. (15 m)	EA

Accessory

IN-2404	308504731	Mounting Bracket	EA
---------	-----------	------------------	----



Trauma Strap



Trauma Strap

- » Allows the fallen worker to assume a standing position and relieve pressure on the lower extremities
- » Allows better blood flow and reduces fatigue
- » Easy to adjust
- » Low profile keeps it out of the way during work
- » Nylon, Polyester and steel
- » Worker Capacity: 420 lbs.



10733

ITEM #	ORDER #	DESCRIPTION	UOM
10733	K62400291	Trauma Strap	EA

Positioning Device



01600



24" Rebar Chain Assembly

- » Lightweight and durable
- » Perfect for work positioning
- » Double legs allow workers to lean away from walls, while keeping their hands free to perform any necessary work
- » Galvanized steel and rebar
- » Non-Swivel Steel Snap Hooks
- » Capacity: 130-310 lbs.

ITEM #	ORDER #	DESCRIPTION	UOM
01600	K62400431	Swivel Rebar Hook Chain Assembly	EA

Lanyards



11200



01220



6' Internal Shock Lanyard w/ Steel Snap Hook

- » Heavy duty outer polyester webbing
- » Shock absorption is built directly into the lanyard
- » Single Leg
- » Steel Snap Hook
- » Capacity: 130-310 lbs.

ITEM #	ORDER #	DESCRIPTION	UOM
11200	K62400191	Internal Shock Lanyard	EA



6' External Shock Lanyard

- » 1" Nylon web
- » Clear shock pack for easy inspection
- » 3,600 lb. connector gate
- » Single Leg
- » Steel Snap Hook
- » Nylon, Polyester and galvanized steel
- » Meets all the stringent ANSI Z359.13-2013 regulations
- » Capacity: 130-310 lbs.

ITEM #	ORDER #	DESCRIPTION	UOM
01220	K62400461	External Shock Lanyard	EA



Lanyards



ShockWave2™ Shock-Absorbing Lanyards

- » 6 ft. (1.8 m) yellow lanyard
- » Stretches in reaction to your movements
- » Abrasion resistant polyester tubular webbing
- » Energy absorbing design limits fall arrest forces
- » Built-in impact indicator
- » Protected labels, equipped with i-Safe™
- » Weight capacity: 130-310 lbs. (59-141 kg)
- » ANSI A10.32, ANSI Z359.1, ANSI Z359.13, OSHA 1910.66, OSHA 1926.502

ITEM #	ORDER #	DESCRIPTION	UOM
1244306	458020121	Single Leg w/ Snap Hooks on Both Ends	EA
1244321	458035081	Single Leg w/ Snap Hook at One End, Steel Rebar Hook at Other End	EA
1244412	458020141	Double-Leg 100% Tie-Off w/ Snap Hook at Center, Steel Rebar Hooks at Leg Ends	EA



EZ-STOP™ Retrax™ Lanyards

- » 2.5 ft. – 6 ft. retractable single leg yellow lanyard
- » Retraction keeps lanyard taut and close to body
- » Adjustable retraction length
- » Arresting forces to 900 lbs. or less
- » 1.375" wide polyester webbing
- » Impact indicator, equipped with i-Safe™
- » Weight Capacity: 130-310 lbs. (59-141 kg)
- » OSHA 1910.66, OSHA 1926.502

ITEM #	ORDER #	DESCRIPTION	UOM
1241460	458014611	2.5 Ft.-6 Ft. Single Leg Lanyard w/ Snap Hooks Both Ends	EA



PRO™ Shock-Absorbing Lanyards

- » 6 ft. (1.8 m) red double-leg 100% tie-off lanyard
- » PVC shock pack with protected label
- » Abrasion resistant polyester webbing
- » Self-locking snap hook at center
- » Self-locking steel rebar hook at leg ends
- » Built-in impact indicator
- » Weight Capacity: 130-310 lbs. (59-141 kg)
- » ANSI A10.32, OSHA 1910.66, OSHA 1926.502

ITEM #	ORDER #	DESCRIPTION	UOM
1340180	458001801	6 Ft. (1.8 m) Double-Leg 100% Tie-Off Lanyard	EA



EZ-STOP™ II Shock-Absorbing Lanyards

- » 6 ft. (1.8 m) yellow lanyard
- » Exclusive Hi-10™ Vectran™ energy absorption system
- » Repel™ webbing
- » Self-locking snap hooks at each end
- » Built-in impact indicator
- » Protected labels, equipped with i-Safe™
- » Weight Capacity: 130-310 lbs. (59-141 kg)
- » ANSI A10.32, ANSI Z2359.13, OSHA 1910.66, OSHA 1926.502

ITEM #	ORDER #	DESCRIPTION	UOM
1246011	458060111	Single-Leg with Snap Hooks at Each End	EA
1246022	458060221	Double-Leg 100% Tie-Off with Snap Hooks at Each End	EA



Lanyards

Honeywell
MILLER

Manyard® II Stretchable Shock-Absorbing Lanyards

- » 6 ft. (1.8 m) retractable single leg green lanyard
- » Shock-absorbing inner core smoothly expands out
- » Tubular outer jacket serves as a back-up lanyard
- » Built-in impact indicator
- » ANSI Z359 Compliant




219M-Z7/6FTGN

ITEM #	ORDER #	DESCRIPTION	UOM
216M-Z7/6FTGN	341558431	6 Ft. Single Leg; (2) Locking Snap Hooks	EA
219M-Z7/6FTGN	341558421	6 Ft. Single Leg; (1) Locking Snap Hook and (1) 2.5 in. Locking Rebar Hook	EA

Honeywell
MILLER

BackBiter® Tie-Back Lanyards

- » All-in-one lanyard with SofStop® shock absorber and cross-arm anchorage connector
- » 5,000 lb. (Miller 5K®) (22kN) gate load capacity from any angle, steel 0.625" (16 mm) locking snap hook
- » Steel, 0.75" (19 mm) locking snap hook gate opening
- » Weight Capacity: 310 lbs. (141 kg)
- » OSHA, CSA and ANSI Z359-2007 compliant

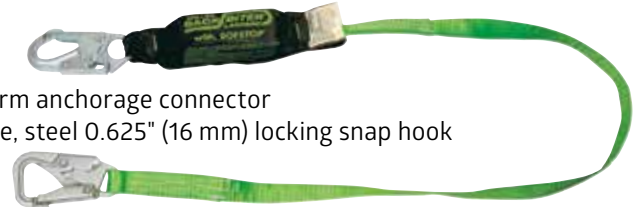

913B/6FTGN

ITEM #	ORDER #	DESCRIPTION	UOM
8798B/6FTGN	341552001	6 Ft. Double Leg, (1) 0.75" Locking Snap Hook and (2) 0.625" (5K®) Snap Hooks, Green	EA
913B/6FTGN	341543671	6 Ft. Single Leg, (1) 0.75" Locking Snap Hook and (1) 0.625" (5K®) Snap Hooks, Green	EA

Honeywell
MILLER

Titan™ II Tubular Shock-Absorbing Lanyards

- » Built-in woven inner core expands reducing fall arrest forces
- » Outer jacket serves as a back-up web lanyard
- » Built-in impact indicator
- » Locking Snap Hooks: 0.75" (19 mm) opening
- » Locking Rebar Hooks: 2.5" (63 mm) opening
- » Weight Capacity: 310 lbs. (141 kg)
- » Meets all OSHA 1926.502, ANSI A10.32, ANSI Z359.13 and CSA Z259.11-05, Class B and E4 requirements



T5122-Z7/6FTAF

ITEM #	ORDER #	DESCRIPTION	UOM
T5111-Z7/6FTAF	341566801	6 Ft. Single Leg; (2) Locking Snap Hooks, Orange	EA
T5112-Z7/6FTAF	341567021	6 Ft. Single Leg; Locking Snap Hook and Large Locking Rebar Hook, Orange	EA
T5121-Z7/6FTAF	341566781	6 Ft. Double Leg; (3) Locking Snap Hooks, Orange	EA
T5122-Z7/6FTAF	341567531	6 Ft. Double Leg; Locking Snap Hook and (2) Large Locking Rebar Hooks, Orange	EA



Lanyards

Honeywell MILLER

Titan™ II Positioning and Restraint Lanyards

- » Web lanyards are recommended for “work positioning” and “restraint” only
- » 1 in. wide orange polyester webbing
- » Locking Snap Hook: 0.75" (19 mm) opening
- » Tensile Strength: 5000 lbs., Weight Capacity: 310 lbs. (141 kg)
- » Meets ANSI Z359-2007, CSA, OSHA standards



T9111W-Z7/6FTAF

ITEM #	ORDER #	DESCRIPTION	UOM
T9111W-Z7/6FTAF	341573291	6 Ft. Web Lanyard with (2) Locking Snap Hooks	EA

Honeywell MILLER

Titan™ II Pack-Type Shock-Absorbing Lanyards

- » Includes the SofStop® shock-absorber pack as an integral part of a standard lanyard
- » In a fall, the pack expands, reducing fall forces while a back-up safety strap deploys protection
- » Built-in impact indicator
- » Locking Snap Hook: 0.75" (19 mm) opening
- » Locking Rebar Hook: 2.25" (57 mm) opening
- » Weight Capacity: 310 lbs. (141 kg)
- » Meets all OSHA 1926.502, ANSI A10.32, ANSI Z359.13 and CSA Z259.11-05, Class B and E4 requirements



T6122-Z7/6FTAF

ITEM #	ORDER #	DESCRIPTION	UOM
T6111-Z7/6FTAF	341567201	6 Ft. Single Leg; (2) Locking Snap Hooks, Orange	EA
T6121-Z7/6FTAF	341567461	6 Ft. Double Leg; (2) Locking Snap Hooks, Orange	EA
T6122-Z7/6FTAF	341567931	6 Ft. Double Leg; (1) Locking Snap Hook and (2) Locking Rebar Hooks, Orange	EA

Honeywell MILLER

Titan™ II Tie-Back Lanyard

- » Pack-type shock absorber is designed for tie-back use
- » Eliminates the need for a separate anchorage connector
- » 9800 lbs. (4445 kg) webbing for abrasion resistance
- » Auto-locking carabiner
- » Locking snap hook for connecting to the harness back D-ring
- » Weight Capacity: 310 lbs. (141 kg)
- » Meets OSHA, ANSI, and CSA standards



T6121TB-Z7/6FTAF

ITEM #	ORDER #	DESCRIPTION	UOM
T6121TB-Z7/6FTAF	341573251	6 Ft. Double Leg; (2) Adjustable D-Rings, (2) Twist Lock Carabiners at Anchor End	EA



Lanyards



Workman® Self-Retracting Lanyard

- » Self-retracting lifeline
- » Black and yellow thermoplastic housing with impact-absorbing bumpers
- » 0.75" 36CS swivel snap hook with load indicator
- » 400 lbs. (136 kg) working capacity
- » RFID-enabled
- » Certified to OSHA, ANSI Z359.14 2012 and CSA Z259.2.2 standards

ITEM #	ORDER #	DESCRIPTION	UOM
10119507	3085377E1	30 Ft. Cable, 0.1875 In. Dia. Steel Cable	EA



10119507



62710-00US



Latchways Leading Edge Retractable Lanyard

- » Self-retracting lifeline
- » Approved for leading, sharp edge and overhead use
- » Stainless steel chassis and components
- » 310 lbs. worker capacity
- » Certified to OSHA and ANSI Z359.14 (LE) standards

ITEM #	ORDER #	DESCRIPTION	UOM
62710-00US	308511061	33 Ft. (10 m) Cable, 36CSN Snap Hook, Steel Carabiner (Top), Yellow	EA



Lifelines



11' Halo Web SRL w/ Steel Snap Hook

- » Designed with a specialized quick-action braking system
- » Manufactured from non-corrosive, lightweight components
- » Extremely durable and compact
- » Galvanized steel, polyester and nylon
- » Swivel top
- » Capacity: 130-310 lbs.



10900

ITEM #	ORDER #	DESCRIPTION	UOM
10900	K62400261	SRL w/ Steel Snap Hook	EA



30' Halo Web SRL w/ Steel Snap Hook

- » Designed with a specialized quick-action braking system
- » Manufactured from non-corrosive, lightweight components
- » Extremely durable and compact
- » Swivel top
- » Galvanized cable
- » Capacity: 130-310 lbs.



10915

ITEM #	ORDER #	DESCRIPTION	UOM
10915	K62400251	SRL w/ Steel Snap Hook	EA



30' Halo Cable SRL-LE

- » Designed specifically for Leading Edge (LE) work
- » Carabiner included
- » Integrated shock absorbing component
- » Galvanized steel lifeline
- » Steel Snap Hook
- » Swivel top
- » Boot cover



10925

ITEM #	ORDER #	DESCRIPTION	UOM
10925	K62400241	SRL w/ Steel Snap Hook	EA

1202754



Rope Lifeline Assemblies

- » 0.625" (16 mm) Dia. polyester/polypropylene blend
- » Built-in self-locking snap hook at one end
- » Durable, high strength 5-tuck splice
- » Equipped with i-Safe™
- » Weight Capacity: 310 lbs. (141 kg)
- » Meets ANSI A10.32, ANSI Z359.1, OSHA 1910.66, OSHA 1926.502 requirements/standards

ITEM #	ORDER #	DESCRIPTION	UOM
1202754	458027541	30 Ft. (9 m) Long	EA
1202794	458035071	50 Ft. (15 m) Long	EA



Rescue Pole

- » Allows assisted rescue of worker after a fall
- » Use with Self-Rescue detachable descent device
- » Extension pole adjusts from 2.16 ft. to 8.66 ft.
- » Aluminum connection hook with tagline
- » Fast and efficient rescues take just minutes
- » Compact and lightweight design

ITEM #	ORDER #	DESCRIPTION	UOM
8900299	458002581	Black, with Storage Bag	EA



8900299



Lifelines



Sealed-Blok™ Self-Retracting Lifeline

- » Environmentally sealed dynamic components
- » FAST-Line™ cable lifeline replacement system
- » Anti-ratcheting locking system
- » Built-in carrying handle, swiveling snap hook with impact indicator
- » Large pivoting anchorage loop, Saflok™ anchorage carabiner
- » Cable tie-off adaptor x 4 ft. (1.2 m) with carabiner
- » Reserve lifeline system, cable handle equipped with i-Safe™
- » Weight Capacity: 420 lbs. (190 kg)
- » Meets ANSI A10.32, ANSI Z359.1, ANSI Z359.14, OSHA 1910.66, OSHA 1926.502 requirements/standards



3400900

ITEM #	ORDER #	DESCRIPTION	UOM
3400900	458020441	50 Ft. (15 m) 0.1875" (5 mm) Galvanized Steel Cable Lifeline	EA



Nano-Lok™ Edge Self-Retracting Lifeline

- » Twin-leg 100% tie-off design for foot-level tie-off and sharp edge applications
- » Built-in connector for twin-leg SRL direct attachment to harness
- » 0.1875" (5 mm) galvanized steel cable
- » Thermoplastic housing
- » Steel rebar lock hooks on each lifeline, swiveling anchorage loops
- » Quick activating speed sensing brake systems
- » i-Safe™ equipped
- » Weight Capacity: 310 lbs. (141 kg)
- » Meets ANSI A10.32, ANSI Z359.14, OSHA 1910.66, OSHA 1926.502 requirements/standards



3500227

ITEM #	ORDER #	DESCRIPTION	UOM
3500227	458012361	8 Ft. (2.4 m) Twin-Leg Lifeline, Orange	EA



Ultra-Lok™ Self-Retracting Lifeline for Retrieval

- » 3-way emergency retrieval system
- » Integrated quick-connect mounting bracket
- » Stowable retrieval handle
- » Thermoplastic housing, stainless steel components
- » Internal energy absorption system
- » Anti-ratcheting twin disk brake system
- » Built-in carrying handle
- » Swiveling anchorage point and snap hook with impact indicator
- » Reserve lifeline system
- » Cable handle equipped with i-Safe™
- » Weight Capacity: 310 lbs. (141 kg)
- » Meets ANSI A10.32, ANSI Z359.1, ANSI Z359.14, OSHA 1910.66, OSHA 1926.502 requirements/standards



3501102

ITEM #	ORDER #	DESCRIPTION	UOM
3501102	458011081	50 Ft. (15.2 m) 0.1875" (5 mm) Galvanized Steel Cable Lifeline	EA



Lifelines



Ultra-Lok™ Cable Self-Retracting Lifelines

- » Semi-sealed design
- » 0.1875" (5 mm) galvanized steel cable lifeline
- » Thermoplastic housing, stainless steel components
- » Internal energy absorption system
- » Anti-ratcheting twin disk brake system
- » Built-in carrying handle
- » Swiveling anchorage point and snap hook with impact indicator
- » Reserve lifeline system
- » Cable handle equipped with i-Safe™
- » Weight Capacity: 310 lbs. (141 kg)
- » Meets ANSI A10.32, ANSI Z359.1, ANSI Z359.14, OSHA 1910.66, OSHA 1926.502 requirements/standards



3504430

ITEM #	ORDER #	DESCRIPTION	UOM
3504430	458020201	30 Ft. (9.1 m) Long Cable	EA
3504433	45804433	20 Ft. (6.1 m) Long Cable	EA
3504450	458044501	50 Ft. (15.2 m) Long Cable	EA



Lad-Saf™ Mobile Rope Grab

- » Mobile rope grab for use on 0.625" (16 mm) rope lifeline
- » Inertia and cam locking systems for safety
- » Design is less sensitive to rope variations
- » Corrosion resistant construction
- » Use with 3 ft. (0.9 m) shock absorbing lanyard
- » Weight Capacity: 310 lbs. (141 kg)
- » Meets ANSI A10.32, ANSI Z359.1, OSHA 1926.502 requirements/standards



5000335

ITEM #	ORDER #	DESCRIPTION	UOM
5000335	458020211	Rope Grab	EA



6160054



Lad-Saf™ Flexible Cable Ladder Safety System

- » For use on 0.375" (9.5 mm) 1 x 7 or 7 x 19 solid core cable
- » Easy to install and detach anywhere along lifeline
- » Dual independent locking system
- » Built-in energy absorber and fall indicator with swivel
- » Saflok™ steel carabiner for secure connection to harness
- » Corrosion resistant construction
- » Integrated RFID tag, equipped with i-Safe™
- » Weight Capacity: 310 lbs. (141 kg)
- » Meets ANSI A14.3-1992 requirements/standards

ITEM #	ORDER #	DESCRIPTION	UOM
6160054	458000561	Ladder Safety System	EA



Lifelines



EZ-Line™ Retractable Horizontal Lifeline System

- » 60 ft. (18.3 m) retractable system can be set at any length
- » Rugged 0.25" (6.3 mm) 7 x 19 galvanized cable
- » Built-in winch, pre-tension and impact indicators
- » Internal energy absorber limits fall arrest forces
- » Use with any 5,000 lb. (22.2 kN) anchorage device
- » Equipped with i-Safe™
- » Weight Capacity: 310 lbs. (141 kg)
- » Meets OSHA 1926.502 requirements/standards



7605060

ITEM #	ORDER #	DESCRIPTION	UOM
7605060	458020231	Lifeline System	EA



Suspension Trauma Safety Straps

- » Allows user to stand in harness after a fall
- » Attaches to almost any harness
- » Compact and lightweight
- » Simple and fast zipper style deployment
- » Continuous loop
- » In-field re-settable
- » Weight Capacity: 310 lbs. (141 kg)



9501403

ITEM #	ORDER #	DESCRIPTION	UOM
9501403	458020251	Safety Straps	PR



Self-Rescue 50/100/Trainer

- » Universal harness attachment
- » EZ-Link™ D-ring for fast connections
- » Assisted-rescue ring for incapacitated user
- » Sealed descent device and rope spool
- » Molded padding
- » Equipped with i-Safe™
- » Weight Capacity: 130-310 lbs. (59-141 kg)
- » Meets ANSI Z359.4, OSHA 1926.502 requirements/standards



3320030

ITEM #	ORDER #	DESCRIPTION	UOM
3320030	458002521	50 Ft. of 5.5 mm, 12 Strand Braided Technora® Rope	EA
3320031	458002351	100 Ft. of 5.5 mm, 12 Strand Braided Technora® Rope	EA
Self-Rescue Trainer Allows up to 20 Descents			
3320037	458002541	30 Ft. of 5.5 mm, 12 Strand Braided Technora® Rope	EA



Lifelines



3100425



Rebel™ Self-Retracting Lifelines

- » Self-locking, swiveling anchorage loop and carabiner
- » Self-locking snap hook on lifeline
- » Stackable thermoplastic housing
- » Speed sensing brake system
- » External energy absorber and impact indicator
- » Weight Capacity: 310 lbs. (141 kg)
- » Meets ANSI A10.32, ANSI Z359.1, ANSI Z359.14, OSHA 1910.66, OSHA 1926.502 requirements/standards

ITEM #	ORDER #	DESCRIPTION	UOM
1" (2.5 cm) Polyester Webbing			
3100425	458004251	11 Ft. Long	EA
3100431	458004311	20 Ft. Long	EA
0.1875" (5 mm) Galvanized Steel Wire			
3590019	458090191	15 Ft. Long with Kevlar®/Nomex® Covered Energy Absorber and Impact Indicator	EA




Rebel™ Self-Retracting Cable Lifelines

- » Stackable thermoplastic housing
- » Built-in carrying handle
- » 0.1875" (5 mm) galvanized steel wire
- » Swiveling self-locking snap hook with impact indicator
- » Speed sensing brake system
- » Internal energy absorption system
- » Reserve lifeline system
- » Swiveling anchorage point
- » Self-locking anchorage carabiner
- » Weight Capacity: 420 lbs. (190 kg)
- » Meets ANSI A10.32, ANSI Z359.1, ANSI Z359.14, OSHA 1910.66, OSHA 1926.502 requirements/standards



3590500

ITEM #	ORDER #	DESCRIPTION	UOM
3590500	458005001	33 Ft. Long Cable	EA
3590550	45800550	50 Ft. Long Cable	EA

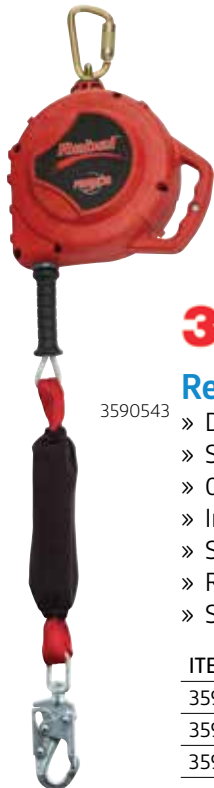

3590543



Rebel™ Self-Retracting Lifeline - Leading Edge

- » Designed for leading edge applications
- » Stackable housing design, thermoplastic housing
- » 0.21875" (5.5 mm) galvanized steel cable lifeline
- » Internal and external energy absorption systems
- » Swiveling self-locking snap hook with impact indicator
- » Reserve lifeline system, side exit
- » Swiveling anchorage point, built-in carrying handle
- » Self-locking anchorage carabiner
- » Weight Capacity: 310 lbs. (141 kg)
- » ANSI A10.32, ANSI Z359.1, ANSI Z359.14, OSHA 1910.66, OSHA 1926.502

ITEM #	ORDER #	DESCRIPTION	UOM
3590543	458034741	33 Ft. Long Cable	EA
3590546	458005971	50 Ft. (15.2 m) Cable	EA
3590548	458005981	66 Ft. (20.1 m) Cable	EA



Lifelines



MightyLite™ Self-Retracting Lifelines

- » Durable and dependable, corrosion-resistant stainless steel and aluminum housing
- » Double-swivel design preventing the lifeline from twisting or kinking
- » Steel twist-lock carabiner and tagline included for attaching to an anchorage
- » Quick-activating inertia brakes, integral load indicator
- » Meets OSHA, ANSI, CSA Z259.2.2 Type 2 and CE requirements

ITEM #	ORDER #	DESCRIPTION	UOM
RL20G-Z7/20FT	341558331	SRL with 20 Ft. (6 m) - 0.1875" (5 mm) Galvanized Wire Rope	EA



RL20G-Z7/20FT



SSRL50G1



DuraSeal™ Self-Retracting Lifelines

- » Patent-pending Miller DuraSeal™ Self-Retracting Lifeline (SRL) is designed to perform in the harshest environments
- » Highest industry rated sealed technology IP69K
- » Built to last reusable brake design withstands multiple falls
- » Enables, quicker easier installation and provides protection from rain
- » Quick, low cost repair is achieved with field

ITEM #	ORDER #	DESCRIPTION	UOM
SSRL50G1	341573691	SRL with Cable Sling, Tagline and 2 Carabiners with 50 Ft. Galvanized Steel Cable	EA

Manhole Guard Systems



XTIRPA™ Manhole Guard System


IN-2108 – Manhole Guard System

- Integrated mast 42", adjustable feet
- Used in conjunction with 24" davit arm (IN-2210)
- Extremely lightweight, easily portable
- Unit weight: 29 lbs., 42"H x 38"W x 38"D
- Meets OSHA regulations

IN-2210 – 24" Davit Arm

- Arm with secondary winch adapter for fall protection
- Used in conjunction with 42" mast (IN-2108)
- Equipped with 5,000 lb. anchor point
- Unit weight: 33 lbs., 67"L x 9"W x 8"H
- Capacity 360 lbs., meets or exceeds ANSI, CSA, OSHA & CE

ITEM #	ORDER #	DESCRIPTION	UOM
IN-2108	308503731	Manhole Guard System	EA
IN-2210	308503721	Davit Arm	EA

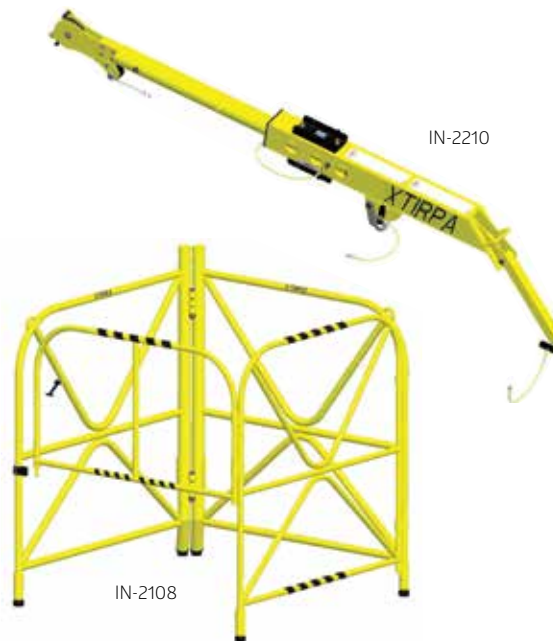

IN-2210

IN-2108