

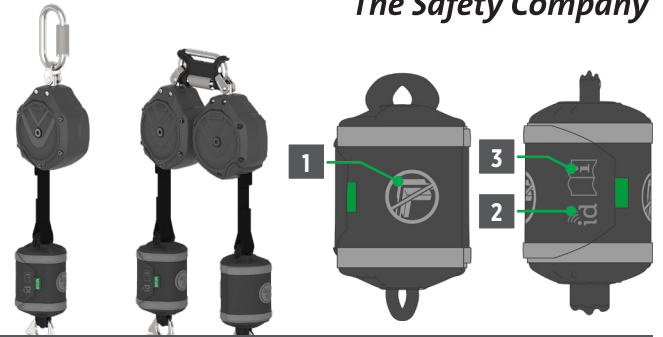


V-SHOCK® Labels & Icons

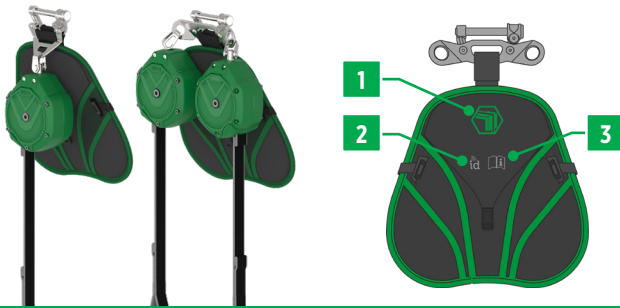

V-SHOCK® EDGE PFLs Leading Edge, ANSI Class 2


V-SHOCK® PFLs Non-Leading Edge, ANSI Class 1



Green Housing
(Leading Edge)

Leading Edge Icon

Scannable RFID



Gray Housing
(Non-Leading Edge)

Non-Leading Edge Icon

Scannable RFID



Labels located beneath flap indicated by “refer to instruction manual” icon.



Labels located beneath flap indicated by “refer to instruction manual” icon.

MSA V-SHOCK® EDGE PFL 6 ft / 1.8 m



ANSI: 310 lb / 141 kg
OSHA: 310 lb / 141 kg

© MSA Technology, LLC 2022

MSA V-SHOCK® PFL 6 ft / 1.8 m

ANSI: 310 lb / 141 kg
OSHA: 400 lb / 181 kg

© MSA Technology, LLC 2022

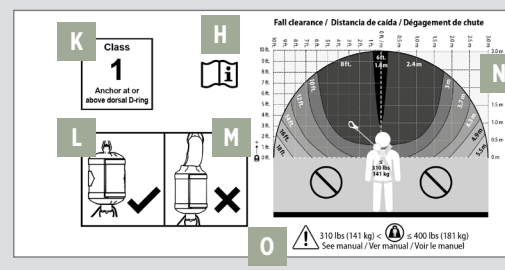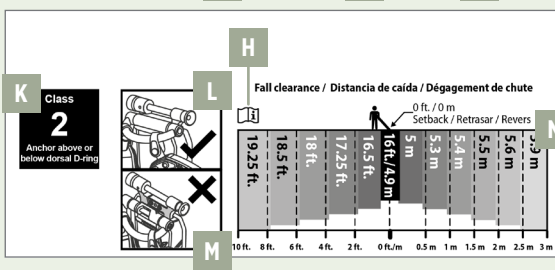

- A** Capacity including user, clothes, and tools
- B** Tie off above D-ring permitted
- C** Tie off below D-ring permitted
- D** Tested for use over an edge (see manual for details and limitations)
- E** Tested for use over steel edge (see manual for details and limitations)

- F** Tested for use over corrugated steel edge (see manual for details and limitations)
- G** **WARNING!** Read and understand instruction manual before use.
- H** Refer to instruction manual
- I** Tie off below D-ring **NOT** permitted

- J** Do **NOT** use over an edge
- K** ANSI Class (see manual for details)
- L** Load indicator **NOT** deployed
- M** Load indicator deployed, **DO NOT USE**
- N** Fall clearance chart (see manual for details)
- O** **WARNING!**