
SRL Ladder Extension Post

Technical Datasheet



MSA's SRL Ladder Extension Post offers an easy-to-install solution when Fall Protection is necessary for climbing activities on fixed ladders. This system may also be a solution to meet OSHA's 1910.28 Walking/Working Surfaces standard.

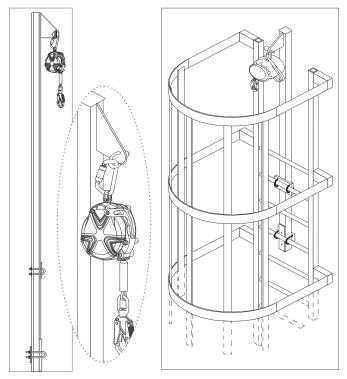

Parts List	
1	Ladder Extension Post
2	2x M10 U-Bolts (Short) w/ Flat & Spring Washers, Nuts A4
3	2x M10 U-Bolts (Long) w/ Flat & Spring Washers, Nuts A4
4	Clamp Plate S/S A4
5	M12 X 40mm Hex Hd Bolt S/S A4
6	M12 Nut, Flat Washer, Spring Washer S/S A4
7	D-ring
8	M12 Single-point Anchorage Label

Part No. 30177-00

SRL Ladder Extension Post

Materials

Extension post	Galvanized mild steel
Grommet	Neoprene
D-ring	316s stainless steel
D-ring label	Aluminum
M12 D-ring fixings	A4 stainless steel
M10 U-bolts	316s stainless steel
M10 fixings	A4 stainless steel
Clamp plate	316s stainless steel

Strength

Extension post—Static strength > 22.2 kN (vertical direction)

Quality control

- 100% Visual inspection
- X-ray inspection of all cast components
- · Batch conformance testing for dynamic performance
- Batch conformance testing for static strength

Approvals

OSHA

Notes

- 1. ANSI Z359.2 and CSA Z259.17 state that anchorages shall be capable of withstanding at least 5,000 lbs (22.2 kN) for non-certified anchorages or at least two times the maximum arresting force for anchorages certified by a qualified person.
- 2. For use with round rungs up to 1" diameter.
- 5. Recommended tightening torque for M10 U-bolt fixings —20 Nm / 15 ft-lbs.
- 6. Recommended tightening torque for M12 D-ring fixings 54 Nm/ 40 ft-lbs.
- 7. Post can be fitted centrally, or to the side of the ladder.

Note: This Bulletin contains only a general description of the products shown. While product uses and performance capabilities are generally described, the products shall not, under any circumstances, be used by untrained or unqualified individuals. The products shall not be used until the product instructions/user manual, which contains detailed information concerning the proper use and care of the products, including any warnings or cautions, have been thoroughly read and understood. Specifications are subject to change without prior notice.

MSA operates in over 40 countries worldwide. To find an MSA office near you, please visit *MSAsafety.com/offices*.